



CONTENTS

Freedom Concept	P4-5	Table Saw	P25
Download BeConnected	P 6	Compound Mitre Saw	P25 - 26
BeConnected App	P 7	Mitre Saw Stand	P26
BITURBO BRUSHLESS	P8-11	Table Saw Stand	P26
ProCORE 18V	P12	Planer	P26
NEW! 18V BITURBO BRUSHLESS	P13	Foam Cutter	P26
3.6 V Li-lon, 12 V Li-lon	P14	Eccentric Sander	P26
12 V Li-lon, 18 V Li-lon	P15	Orbital Sander	P26
18 V Li-lon	P16 - 18	Polisher	P26 - 27
36 V Li-lon	P18	Blower	P27
12 V Battery Pack	P18	Belt Sander	P27
18 V Battery Pack	P18	Hot Air Gun	P27
ProCore 18 V	P18	Mini Router / Trimmer	P27
36 V Battery Pack	P18	Wet & Dry Vacuum Cleaner	P27
Charger	P18	Dust Free Solution	P28
L-BOXX	P18	Cordless Optical Scope	P29
12 V / 18 V Starter Kit	P18	Laser Rangefinder	P29
Drill	P18 - 19	Detector	P29
Impact Drill	P19	Thermo Detector	P29
Multi-Cutter	P19	Line Laser	P29 - 30
Rotary Hammer	P19 - 20	Point Laser	P30
Rotary Hammer with SDS-Max	P20	Rotation Laser Level	P30
Dust Extractor	P20 - 21	Angle Measurer	P30
Demolition Hammer	P21	Digital Inclinometer	P30 - 31
Straight Grinder	P22	Tripod	P31
Angle Grinder	P22 - 24	Telescopic Pole	P31
Impact Wrench	P24	Laser Receiver	P31
Stirrer / Mixer Drill	P24	Rotation Mount	P31
Shear	P24	Universal Holder	P31
Bench Grinder	P24	High Pressure Washer (Suitable for Home Use)	P32
Marble Cutter	P24	High Pressure Cleaner (Suitable for Industrial Use)	P32
Nibbler	P24	Grass Shear, Grass Trimmer, Lawn Mower	P33
Circular Saw	P25	Bosch 110V Power Tools	P34
Drywell Screwdriver	P25	Carbon Brush Guidelines	P35
Reciprocating Saw	P25	Warranty	P36
Jigsaw	P25	Notes	P37 - 39
Cut off Machine	P25		



All tools comes with Full Warranty*!

Includes Wear & Tear Parts! FREE Repair Costs!!

All Bosch Power Tools, GHP Range High Pressure Cleaners, Bosch Measuring Tools, batteries and chargers are entitled to 1 year Full Warranty except Aquatak Range High Pressure Cleaners and Garden Tools which are entitled to 6 months warranty. Full Warranty is exclusively available at Powerwell Service Centre only.

Bosch reserves the right to amend the terms & conditions or withdraw the promotion at its sole discretion without prior notice.






The **Freedom**Concept

The freedom concept provides the freedom to choose cordless tools, batteries, chargers, and carrying cases exactly according to your needs. You are now free to choose.



Bosch Lithium-Ion Cordless Tools Range

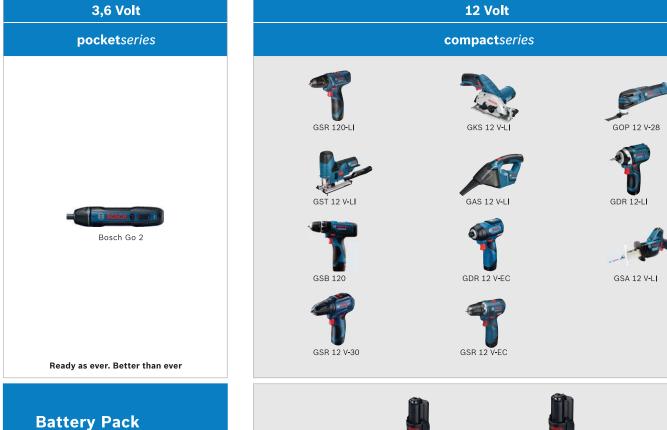



Charger

Starter Kit

L-BOXX

INNOVATIVE BOSCH CORDLESS TECHNOLOGY





Kick Back Stop detects sudden movements and stop tool rotation





ETP protects your tool from Rain & Dust





CHOOSE YOUR OWN COMBINATION










L-BOXX



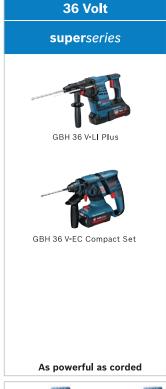







EMP protects the motor against overload and automatically shuts it down in case of stalling





2 X Lifetime up to 30% more runtime



EC Brushless MotorNo brush sparking due to electrical switch by electrics




DC MotorBrush sparking at every mechanical switch operation



ECP prevents your battery from deep discharge, overheating, overload





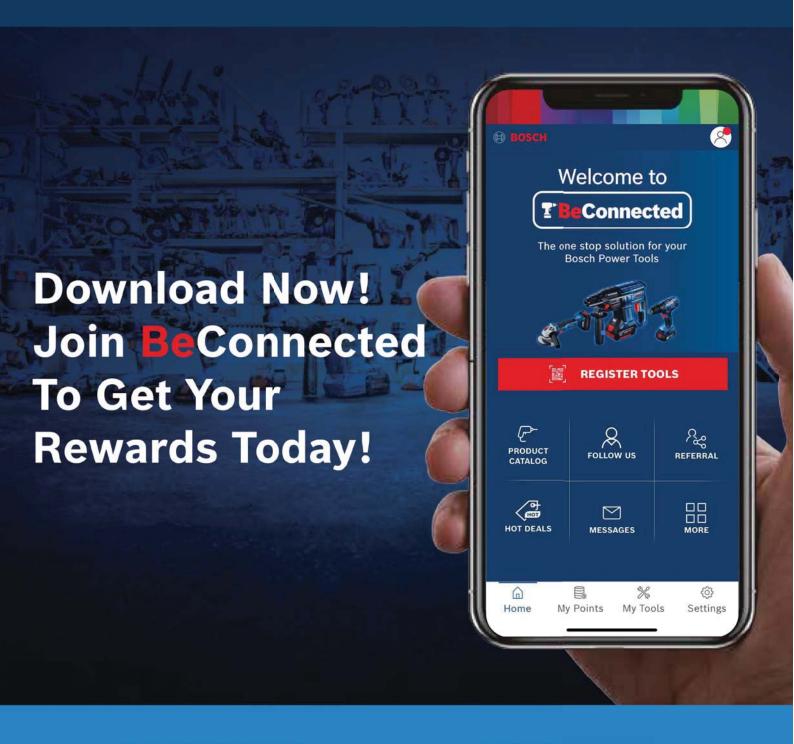





SCAN ME! _{扫描我!}





What is BeConnected App?

Welcome to **Bosch BeConnected!** – a power-packed digital app that enables you to check on our Hot Deals, make purchases, and earn points to redeem for great rewards. Other great user-friendly features include e-warranty, product catalogue, dealers and service centres locator, instant messaging, etc. Read on to discover how to enjoy a better digital lifestyle with **Bosch BeConnected** and download the App today!

BeConnected App Features



Product Catalog

Find genuine product information, video & reviews at your convenience.



Messages

Get alerts on notification here.



Follow Us

Stay in touch with us on Facebook, Instagram, Website or contact us on our hotline.



My Points

Check total points, points used and balance points.



Referral

Invite your friends via Facebook, SMS or link to be part of BOSCH BeConnected community by downloading the app.



My Tools

Check products history and track purchase history.



Hot Deals

Check out the latest promotion and the Best Buys!



Redeem Gifts

Check gifts catalogue and redeem your favorite gifts with your points! You can check redeem history too.

How to download BeConnected App?













REVOLUTIONARY PERFORMANCE. FEEL THE EXTREME.



BITURBO TOOLS SET NEW STANDARDS IN PERFORMANCE WITH LESS WEIGHT AND MAXIMUM OOMPH.

Maximum Power | Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.

Perfect handling | BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor Tools with two batteries.

Ultimate control | Multiple clever technologies make your work safer, faster and more efficient.

Fully compatible | Compatible with all new and existing Batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

New highperformance motor



Our most powerful battery ever

BITURBO Brushless: Up to 1,800 watts of corded power.





BITURBO IS ENGINEERED FOR HIGHEST PERFORMANCE AMONGST 18V SYSTEM

The Professional 18V System combines highest performance with compact dimensions and minimum weight to make your toughest jobs easier. Benefit from the ultimate in performance, uncompromising compatibility and maximum freedom on your job site.

+87%¹ MORE POWER

ProCORE18V: latest cell technology and intelligent battery management.



Up to +135%² **LONGER LIFETIME**

COOLPACK 2.0 technology: prevents the battery from overheating.

Up to +151%³ **EXTENDED RUNTIME**

Excellent battery performance: When other batteries switch off, you just keep working.

PERFECTLY ENGINEERED FOR HIGHEST PERFORMANCE.

9 min to 50%4 FASTEST CHARGING

Get back to work faster than ever thanks to the world charging champion GAL 18V-160 C Professional.









BITURBO TOOLS NOW EVEN BETTER THAN CORDED













EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP

Connect BITURBO Tools with App for Maximum Efficiency & Customization



World's First Levelling Function




Personalized Speed Levels



GCM 18V-305 GDC



Default Setting

















Personalized Setting

A new dimension of power

It's in your hands. Bosch Professional.



ProCORE18V 4.0Ah
All the power of a standard battery

- not its weight.

ProCORE18V 8.0Ah

The perfect balance between weight and power - with up to 1,600W corded power.

ProCORE18V 12.0Ah
Maximum performance and runtime.

When other batteries cannot handle the heat and switch off, ProCORE18V powers through.



+30%

Removes more material in 2 minutes.



+70%

More holes per charge.



+151%

More holes per charge.

NEW! 18 V BITURBO BRUSHLESS

GDS 18 V-1050 H (Bare Unit Only) **Cordless Impact Wrench**

HEAV)



=(11)

Capacity

No-load Speed	: 0 - 1750 Nm
Max. Torque	
(1st/2nd/3rd level)	: 350/750/1050 Nm
Max. Breakaway Torque	: 1700 Nm
Battery Voltage	: 18 V
Impact Rate	: 0 - 2,600 bpm

GSR 18 V-150 C (Bare Unit Only) Cordless Drill/Driver

HEAV)



EMILIAN ESS MOTOR Capacit

No-load Speed (1st gear)	: 0 - 550 rpm
(2nd gear)): 0 - 2,200 rpm
Torque (soft/hard/max.)	: 84/100/150 Nm
Chuck Capacity min/max	: 1.5 / 13 mm
Torque Settings	: 25 + 1
Battery Voltage	: 18 V
Weight excl. battery	: 2.1 kg

GSB 18 V-150 C (Bare Unit Only) **Cordless Combi**

HEAVY DUTY



: 2.2 kg

Weight excl. battery

Capacity	
No-load Speed (1st gear): 0 - 55	0 rpm
(2nd gear): 0 - 2,2	200 rpm
Torque (soft/hard/max.) : 84/10	0/150 Nm
Chuck Capacity min/max : 1.5 / 3	13 mm
Torque Settings : 25 + 1	
Battery Voltage : 18 V	

Capacit : 500 min-1 No-load Speed Max. Impact Energy : 6.0 J Impact Rate : 2,900 bpm Equivalent to Corded Power : 950 W Battery Voltage 18 V Weight with Battery 5.9 kg

GBH 18 V-34 CF (Bare Unit Only)

Cordless Rotary Hammer

HEAVY DUTY

GBH 18 V-36 C (Bare Unit Only) **Cordless Rotary Hammer**



Capacity	
No-load Speed	: 500 min-1
Max. Impact Energy	: 7 J
Impact Rate	: 2,900 bpm
Equivalent to Corded Power	: 1,000 W
Battery Voltage	: 18 V
Weight with Battery	: 6.1 kg

GBH 18 V-45 C (Bare Unit Only) **Cordless Rotary Hammer**



Capacity	
Single Impact Energy	: 12.5 J
Impact Rate Drilling	: 2,720 bpm
Impact Rate Chiselling	: 2,760 bpm
Drilling Diameter	: 12 - 45 mm
Rated Toll Speed	: 0 - 305 rpm
Battery Voltage	: 18 V
Weight with Battery	: 9.3 kg

GKS 18 V-68 GC (Bare Unit Only) Cordless Circular Saw



Capacity	
Battery	: ProCore 18V 8.0*
SB Diameter /	: 190
Bore Size	: 30**
Cutting Capacity 0°	: 68 (50 / 45)
Bevel Capacity	: 050°
Battery Voltage	: 18 V
RPM	: ~2,5005,000

GTS 18 V-216 (Bare Unit Only) **Cordless Table Saw**



MOTOR # 216 mm		
Capacity		
No-load Speed	: 4,500 rpm	
Saw Blade Diameter	: 216 mm	
Bare Hole Diameter	: 30 mm	
Cutting Capacity	: 635 mm	
Cutting Height	: 70 mm	
Battery Voltage	: 18 V	
Weight	: 21.6 kg	

GCM 18 V-216 (Bare Unit Only) **Cordless Mitre Saw**



Capacity	
No-load Speed	: 4,600 rpm
Cutting Dept 0°/45°	: 70 / 45 mm
Cross Cut Capacity 0º/45º	: 270 / 190 mm
Sawblade Diameter	: 216 mm
Battery Voltage	: 18 V
Weight w/o Battery	: 14.7 kg

GCM 18 V-305 GDC (Bare Unit Only) **Cordless Mitre Saw**



WYENDACE CO.	
Capacity	
No-load Speed	: 2,550 - 4,000 rpm
Max. Cutting Dept	: 120 mm
Width	: 400 mm
Equivalent to	: 2,000 W
Disc Diameter	: 305 mm
Battery Voltage	: 18 V
Weight incl. Battery	: 27.8 kg

GWS 18 V-15 SC (Bare Unit Only) **Cordless Angle Grinder**

HEAVY



Capacity	
No-load Speed	: 3,400 - 9,800 rpm
Equivalent to	
Cored Power	: 1,500 W
Cutting Disc Diameter	: 100 mm
Battery Voltage	: 18 V
Weight eyel Battery	. 2 3 kg

GWX 18 V-15 SC (Bare Unit Only) **Cordless Angle Grinder**



Capacity	
No-load Speed	: 3,400 - 9,800 rpm
Cutting Disc Diameter	: 125 mm
Battery Voltage	: 18 V
Weight excl. Battery	: 2.3 kg

GCY 42 (Bare Unit Only)

HEAVY DUTY

HEAV)

=



Capacity	
Reach	: 30 mm
Output Power	: <1 mW
Weight	: 0.01 kg







Bosch GO 2 **Cordless Screwdriver**







Capacity

No-load Speed	: 360 rpm
Torque (Hard / Soft)	: 5 / 2.5 Nm
Max. Screw Diameter	: 5 mm
Electronic Brake	: Yes
Tool Holder	: ¼" Inter HEX
Smart Stop	: Yes
Charging Port	: Micro USB
Battery Voltage	: 3.6 V / 1.5 Ah
NAZ - Coulo A	0.21 1

Bosch GO 2 Kit (included Cable, 33x Bits Cordless Screwdriver)





12 V Li-lon

GSB 120-LI Cordless Impact Drill Driver



Capacity

Drilling Dia. In Steel	: 6 mm
In Wood	: 19 mm
In Masonry	: 8 mm
Max. Torque (Hard / Sof	ft joint): 28 / 11 Nm
Max. Screw Dia.	: 7 mm
No-load Speed	: 0 - 400 / 1,300 rpm
Battery Voltage	: 12 V / 2.0 Ah
Weight	: 1.1 kg

Spare Parts

Switch	2 609 125 169
Chuck	2 609 111 312
Gear Box	1 600 A00 DM7
Motor	2 609 199 258

GSR 120-LI Cordless Drill / Screwdriver



Capacity

Drilling Dia. In Steel	: 10 mm
In Wood	: 20 mm
Max. Torque (Hard / S	Soft joint): 30 / 13 Nm
Max. Screw Dia.	: 7 mm
No-load Speed	: 0 - 380 / 1,300 rpn
Battery Voltage	: 12 V / 2.0 Ah
Weight	: 1.0 kg

Spare Parts

Switch	2 609 125 169
Motor	2 609 199 258
Chuck	2 609 111 312
Gear Box	2 609 199 786

GKS 12 V-LI (Bare Unit Only) **Cordless Circular Saw**







Spare Parts

Capacity	Capacity	
No-load Speed	: 1,400 rpm	
Depth of Cut - 90°	: 26.5 mm	
Bore Diameter	: 15 mm	
Max. Bevel	: 45°	
Weight	: 1.4 kg	

GOP 12 V-28 (Bare Unit Only) **Cordless Multi-Cutter**





Capacity

Osci ll iation	
angle on left / right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Battery Voltage	: 12 V
Weight	: 1.0 kg

GWS 12-76 V-EC (Bare Unit Only)





Capacity

No-load Speed	: 19,500 rpm
Battery Voltage	: 12 V
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GST 12 V-LI (Bare Unit Only) Cordless Jigsaw







Capacity

No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity:	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

Spare Parts

	-
Motor	1 619 D10 586
Nozzla	1 610 D10 585

1 619 P11 537 Suction Nozzle Parallel-Guide 1 619 P11 536

Spare Parts

Screw 2 609 110 797 2 609 199 180 Motor

GAS 12 V-LI (Bare Unit Only) **Cordless Vacuum Cleaner**







Cupacity	
Filter Surface	: 408 cm ²
Max. Airflow	: 12 I /sec
Max. Ventilaling Pressure	: 45 mbar
Battery Voltage	: 12 V
Weight	: 0.9 kg

Spare Parts

Filter 1 600 A00 2PS Nozzle 1 600 A00 2PP

GDR 120-LI Cordless Impact Driver







Max. Torque	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Rated Impact Rate	: 2,800 - 3,300 bpm
Bit Holder	: 1/4" internal hexagon
Battery Voltage	: 12 V / 2.0 Ah
Waight	1 0F kg

GDR 12 V-EC Cordless Impact Driver

HEAVY DUTY





Capacity

Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Battery Voltage	: 12 V / 2.0 Ah
Weight	. 0.95 kg

Spare Parts

Electronic Module 1 607 233 581 Brushless DC Motor 2 609 199 661

GSA 12 V-LI (Bare Unit Only) **Cordless Sabre Saw**

HEAVY DUTY











Capacity	
Stroke Speed	: 0 - 3,000 min
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm
Weight	: 1.2 kg

Spare Parts

Motor 1 619 P08 652 Electronic Module 1 619 P08 618

12 V Li-lon

GSR 12V-30 Cordless Drill / Driver

HEAVY DUTY



Capacity

No-load Speed	· U	-420 / 1,600 rp
Torque (Hard / Soft)	1	7 / 30 Nm
Drilling in Wood / Steel	20	0/8 mm
Battery Voltage	1:	2 V / 2.0 Ah
Weight	0.	.82 kg

GSB 12V-30 Cordless Impact Drill

HEAVY DUTY



Capacity

No-load Speed	: 0 - 420 / 1,600 rpm
Torque (Hard / Soft)	: 17 / 30 Nm
Drilling in Wood / Steel	: 20 / 8 mm
Battery Voltage	: 12 V / 2.0 Ah
Weight	: 0.82 kg

*GUS 12V-LI (Bare Unit Only) **Cordless Universal Shear**

HEAVY DUTY



Capacity

No-load Stroke Rate	: 700 spm
Charging Time	: 45 mins
Weight	: 1.0 kg

Spare Parts

Upper Blade	1	619	PA2	338
DC Motor	1	607	000	751

*GSR 12-15 FC **Cordless Drill / Driver**

HEAVY







Capacity

Drilling Dia.: In	n Steel	: 10) mm	
l	n Wood	: 19	mm	
Max. Torque H	lard / Soft	: 30) / 15 Nm	
No-load Speed	d	: 0	400 / 1,300	rpm
Battery Voltag	ge .	: 12	2 V / 2.0 Ah	
Chuck Capacit	ty	: 10) mm	
Weight :	0.6 kg			

18 V Li-lon

GSR 185-LI Cordless Drill / Driver















Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Head Length	: 162 mm
No-load Speed	: 0-500/1,900 rpm
Max Torque Hard / Soft	: 50 / 21 Nm
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm

: 1.3 kg

#GDS 18 V-400 (Brushless) Cordless Impact Wrench







Capacity

Tool Holder	: 1/2" Square
No-load Speed	: 0 - 2,500 rpm
Impact Rate	: 0 - 3,700 bpm
Max. Torque	: 400 Nm
Screw Diameter	: M10 - M20
Battery Voltage	: 18 V / 5.0 Ah
Weight	· 1 25 kg

GDX 180-LI Cordless Impact Wrench/Driver







Capacity

Tool Holder	: Hex & Square
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max. Torque	: 180 Nm
Screw Diameter	: M6 - M16
Battery Voltage	: 18 V / 2.0 Ah
Weight	: 1.45 kg

GKS 185-LI (Bare Unit Only) Cordless Circular Saw













Capacity

Blade Diameter	: 165 mm
Saw Blade Bore Dia.	: 20mm
No-load Speed	: 5,000 rpm
Weight	: 2.8 kg

GOP 185-LI (Bare Unit Only) Cordless Multi-Cutter



Weight


GOP 18 V-28 (Bare Unit Only) Cordless Multi-Cutter





GSA 185 LI (Bare Unit Only) Cordless Sabre Saw






















Oscillation Angle	
Left / Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Weight	: 2.0 kg





Weight



: 3.2 kg





Weight



: 3.5 kg

18 V Li-Ion

GSB 180-LI Cordless Impact Drill



Capacity	
Max Drilling Masonry	: 10 mm
Max Screw Diameter	: 10 mm
Max Drilling Steel / Wood	: 10 mm / 35 mm
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Battery Voltage	: 18 V / 2.0 Ah
Weight	: 1.6 kg

Spare Parts

Carbon Brush 1 607 000 CZ1 1 607 022 66N

GSB 185-LI Cordless Impact Drill



: 35 mm
: 10 mm
: 10 mm
: 10 mm
: 50 / 21 Nm
: 0 - 500 / 1,900 rpm
: 18 V / 2.0 Ah
: 1.3 kg

GSB 18V-50 (Bare Unit Only) **Cordless Impact Drill**



Capacity

Drilling Dia. In Steel	: 13 mm
In Wood	: 35 mm
In Masoni	ry: 13 mm
Max. Torque (Hard / S	oft joint) : 50 / 28 Nm
No-load Speed	: 0-460 / 0-1,800 rpm
Max.screw Ø	: 10 mm
Battery Voltage	: 18 V / 5.0 Ah

GSR 18 V-50 (Bare Unit Only) Cordless Drill / Driver



Capacity

Drilling Dia. In Steel	: 13 111111
In Wood	: 35 mm
Max. Torque	
(Hard / Soft joint)	: 50 / 28 Nm
No-load Speed	: 0-460/0-1,800 rpm
Max.screw Ø	: 10 mm
Battery Voltage	: 18 V / 5.0 Ah

GSB 18 V-90C (Bare Unit Only) Cordless Drill / Driver









: 1.2 kg

GTB 185-LI (Bare Unit Only) **Drywall Screwdriver**



Capacity

Torque (Hard / Soft)	: 32 / 5.2 Nm
No-load Speed (1st gear)	: 0 - 4,500 rpm
Bit Holder	: 1/4" Hex Uni
Battery Voltage	: 18 V
Weight	: 0.95 kg

GSS 18 V-LI (Bare Unit Only) Orbital Sander







Capacity

Stroke Length	: 28 mm
No-load Orbital Stroke Rate	: 22,000 opm
No-load Speed	: 11,000 rpm
Oscillating circuit Diameter	: 1.6 mm
Weight	: 1.0 kg

No-load Speed	: 11,000 rpm
Oscillating circuit Diameter	: 1.6 mm
Weight	: 1.0 kg

Spare Parts

Plate	2 609 101 073
Felt	2 609 170 230
Spring	2 609 111 892

GEX 185 LI (Bare Unit Only) **Eccentric Sander**













: 125 mm
.: 2.5 mm
: 6,000 - 10,000 rpm
: 12,000 - 20,000 opm
: 1.25 mm
: 18 V
: 0.93 kg

GST 185 LI (Bare Unit Only) Cordless Jigsaw



Weight











Capacity

Stroke Rate at No-load	: 0 - 3,500 spm
Stroke Height	: 26 mm
Battery Voltage	: 18 V
Weight excl Battery	: 2.0 kg

#GWS 180 LI **Cordless Angle Grinder**



Canacity

Capacity	
No-load Speed	: 11,000 rpm
Bore Size, Diameter	: M16
Grinding Spindle Thread	: M10
Grinding / Cutting Disc Dia.	: 100 mm
Battery Voltage	: 18 V / 4.0Ah
Weight excl Battery	: 1.4 kg

GWS 18 V-10P (Bare Unit Only) Cordless Angle Grinder





GWX 180 LI (Bare Unit Only) Cordless Angle Grinder









Capacity

No-load Speed	: 9,000 rpm
Grinding Spindle Thread	: M10
Grinding / Cutting Disc Dia.	: 100 mm
Battery Voltage	: 18 V
Weight excl Battery	: 1.8 kg

Capacity

No-load Speed	: 11,000 rpm
Grinding / Cutting Disc Dia.	: 125 mm
Battery Voltage	: 18 V
Weight excl Battery	: 1.6 kg

GWS 18 V-10 (Bare Unit Only) Cordless Angle Grinder

HEAVY DUTY







Max. Output Power: Equivalent to 1000 W Disc-Ø : 100 (M10)mm No-load Speed : 9.000 rpm Grip Circumference: 155 mm Battery Voltage : 18 V / 8.0Ah ProCORE

GWS 18 V-15P (Bare Unit Only) Cordless Angle Grinder

HEAV DUTY







paci	ty	PROCESSION SANICA	
load :	Spee	d	
dina	Cnir	dlo T	broad

: 9.800 rpm No-Grinding Spindle Thread : M14 Grinding / Cutting Disc Dia. : 125 mm Bore Size, Dia : 22.2 mm Battery Voltage : 18 V Weight excl. Battery : 2.2 kg

GGS 18 V-LI (Bare Unit Only) **Cordless Straight Grinder**

DUTY





Сарасіту	
No-load Speed	: 2 - 22.000 rpm
Weight	: 1.8 kg

Spare Parts 1 617 000 6B0 Motor Electronic Module 1 607 233 340

GHG 18 V-50 (Bare Unit Only) Cordless Hot Air Gun

HEAVY DUTY





Capacity

Working temperature	: 300 - 500 °C
Airf l ow	: 175 /min
Weight excl. battery	: 0.59 kg

GAS 18 V-1 (Bare Unit Only) **Cordless Vacuum Cleaner**

Weight Without Battery : 2.0 kg







Capacity

Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min/Ah

Weight (w/o batt, w/o AC): 1.3 kg

GAS 18 V-10 L (Bare Unit Only) **Cordless Vacuum Cleaner**







Capacity

Container (gross / Net)	: 10 / 6 Litre
Max. Underpressure	: 9 kPa
Max. Airflow	: 24 I /sec
Filter Surface Area	: 2.375 cm ²
Runtime	: 4 min/Ah
Weight (w/o batt, w/o AC)	: 4.7 kg

Wet / Dry Usage

GBL 18 V-120 (Bare Unit Only) Blower







Capacity

No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Vo l ume	: 2.0 m³/min
Runtime	: Speed I : 9 min / Ah
	: Speed II: 5 min / Ah

Weight without Cable: 1.1 kg

Spare Parts

Nozzle 1 619 PA9 087

GCB 18 V-63 (Bare Unit Only) **Cordless Band Saw**













Capacity

No-load Speed : 162 m/min Saw Blade Diameter: 733 x 12,7 x 0.4 mm Max. Cutting Depth : 63,5 mm Weight : 3.3 kg

GKM 18 V-50 (Bare Unit Only) Cordless Circular Saw







Capacity	
No-load Speed	: 4,250 rpm
Saw Blade Diameter	: 136 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Depth in metal	: 50mm
Weight excl. Battery	: 2.2 kg

GBH 18 V-26 (Bare Unit Only) Cordless Rotary Hammer

HEAVY















Capacity	
In Concrete	: 4 - 26 mm
In Steel / Wood	: 13 mm / 30 mm
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Impact Energy	: 2,6 J
Max. Drilling Ø Concrete	: 26 mm
Weight	: 3.6 kg**

GBH 18 V-26 + GDE 18 V-16 Cordless Rotary Hammer + **Dust Extractor**

DUTY













Capacity	
In Concrete	: 4 - 26 mm
In Steel / Wood	: 13 mm / 30 mm
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Impact Energy	: 2,6 J
Max. Drilling Ø Concrete	: 26 mm
Battery Voltage	: 18 V / 6.0 Ah
Weight	: 3.6 kg**

#GBH 185-LI **Cordless Rotary Hammer**









Capacity Drilling Dia In Concrete . 4 - 22 mm

Drilling Dia. In Concrete	: 4 - 22 111111
No-load Speed	: 0 - 1,050 rpm
Impact Rate	: 0 - 4,675 bpm
Impact Energy	: 1.9 J
Battery Voltage	: 18 V / 4.0 Ah
Weight excl. Battery	: 2.3 kg

18 V Li-Ion

#GBH 187-LI **Cordless Rotary Hammer**



Capacity

In Concrete : 4 - 24 mm	
In Steel / Wood : 13 / 30 mm	
No-load Speed : 0 - 980 rpm	
Impact Rate : 0 - 4,350 bpm	1
Impact Energy : 2.4 J	
Battery Voltage : 18 V	
Weight : 2.9 kg	

36 V Li-Ion

GBH 36 V-LI Plus Cordless Rotary Hammer





Oupucity	
In Concrete	: 4 - 28 mm
In Steel / Wood	: 13 / 30 mm
No-load Speed	: 0 - 940 rpm
Impact Rate	: 0 - 4,200 bpm
Battery Voltage	: 36 V / 4.0 Ah
Weight	: 4.5 kg

Spare Parts

Motor	1 607 022 662	
Electronics Module	1 600 A01 1GZ	
Tool Holder Fixture	1 617 000 6CB	

GBH 36 V-EC Compact Cordless Rotary Hammer





Capacity	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Weight	: 2.9 kg

Spare Parts

Protection Sleeve	1 617 000 6D3
Electronics Module	1 607 233 316
Hammer Piston	1 618 700 083
O-ring	1 610 210 244
Jack Shaft	1 617 000 668

12 V Battery Pack



12 V, 2.0 Ah




12 V, 2.5 Ah

18 V Battery Pack

ProCore 18 V

36 V Battery Pack

Charger













2.0 Ah









L-BOXX

12 V / 18 V Starter Kit



L-BOXX 102



L-BOXX 136



L-BOXX 238



L-BOXX 374



12 V 2.0 Ah (2 Batteries) + GAL 12 V-40 (1 Charger)



18 V 2.0 Ah (2 Batteries) + GAL 18 V-40 (1 Charger)



18 V 4.0 Ah (2 Batteries) + GAL 18 V-40 (1 Charger)



Charger (AL 1860 CV) + 2 Battery Packs (18 V, 4.0 Ah)



GBA 18 V 1 X 4.0 Ah MW



2.0 Ah 18 V (1 Charger + 1 Battery)



GBM 10 RE





Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Weight	: 1.3 kg

Spare I al ts	
Carbon Brush	2 610 391 290
Switch	2 607 200 623
Chuck	2 608 571 078

GBM 13 RE





Capacity

Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Weight	· 1 65 kg

Spare Parts

Carbon Brush 2 610 391 290 2 607 200 623 Switch 2 608 572 253

GBM 13 HRE "High Torque"





Capacity

Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque	: 40 Nm
Weight	: 2.1 kg

Spare Parts

Carbon Brush 1 607 031 222 Switch 2 607 200 920 Chuck 2 608 572 253

*GBM 23-2 E

HEAVY DUTY



Capacity	
Power Input	: 1,150 W
In Steel	: 23 /13 mm
In Wood	: 50 / 35 mm
No-load Speed Hi	: 0 - 640 rpm
Lo	: 0 - 280 rpm
Weight	: 4.6 kg

Spare Parts

Carbon Brush 3 607 014 012 Switch 1 607 200 075

GBM 50-2





Power Input	: 1,200 W
No-load Speed	: 50 - 255 / 100 - 510 rpm
Annular Cutter	: Ø50 mm
Max. Twist Drill	: Ø23
Max. Thread	: M16
Weight	: 14.7 kg

Impact Drill

GBM 400 GSB 10 RE (Also Available in 110V)





Capacity

Power Input	: 400 W
Keyless Chuck	: 10 mm
No-load Speed	: 0 - 2,800 rpm
Weight	: 1.3 kg

: 500 W : 10 mm

: 8 mm

: 20 mm

: 1.5 kg

: 0 - 2,600 rpm





Capacity

650 W
13 mm
10 mm
20 mm
0 - 3,150 rpm
0 - 47,000 bpm
1.6 kg

Spare Parts

Carbon Brush	2 610 391 290
Switch	2 607 200 623
Chuck	2 608 572 253

GSB 16 RE (Also Available in 110V)





Capacity

Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Weight	: 1.8 kg

Spare Parts

Carbon Brush	2 610 391 290
Switch	1 607 200 270
Chuck	2 608 572 253

GSB 20-2 RE





Canacity

Capacity	
Power Input	: 800W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood (hard)	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Weight	: 2.6 kg

Snare Parts

- par - ar - ar	
Carbon Brush	1 617 000 525
Switch	1 607 200 270
Chuck	2 608 572 253

*GSB 21-2 RCT

Capacity

Power Input In Masonry

No-load Speed

Spare Parts

Carbon Brush 2 610 391 290

2 607 200 623

2 609 120 232

2 604 220 718

2 608 571 078

In Steel

In Wood

Weight

Switch

Coil

Chuck

Armature





Capacity

Oupacity	
Power Input	: 1,300 W
In Concrete	: 22 / 13 mm
In Steel	: 16 / 10 mm
In Wood (hard)	: 40 / 25 mm
No-load Speed	: 0 - 900 / 3,000 rpm
Max. Torque	: 43 - 20.5 Nm
AAZ-1-L-E	0.01

Power Input	: 1,300 W
In Concrete	: 22 / 13 mm
In Steel	: 16 / 10 mm
In Wood (hard)	: 40 / 25 mm
No-load Speed	: 0 - 900 / 3,000 rpm
Max. Torque	: 43 - 20.5 Nm
Weight	: 2.8 kg

Spare Parts

Carbon Brush 1 617 000 525 2 607 200 679 Switch

Multi-Cutter

GOP 30-28







Capacity

Power Input	: 300W
Oscillating amplitude	e: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Rotary Hammer

GBH 2-23 RE (Only available in 110V)





Capacity

Power Input	: 650 W
In Concrete	: 23 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,000 rpm
Impact Rate	: 0 - 4,400 bpm
Weight	: 2.3 kg

Carbon Brush	1 617 000 525
Switch	1 617 200 532
Armature	1 617 000 561
Coil	2 604 220 693

Rotary Hammer

GBH 220



Capacity

Power Input	: 720 W
In Concrete	: 22 mm
In Metal	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2 J
Impact Rate	: 0 - 4,800 bpm
Weight	: 2.3 kg

GBH 2-24 RE / DRE

HEAVY



Capacity	
Power Input	: 790 W
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.7 J
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 4,200 bpm
Weight	: 2.8 kg

Spare Parts

Carbon Brush	1 617 000 525	
Switch	1 607 200 32D	
Armature	1 619 P13 626	

GBH 2-26 RE (Also Available in 110V)



Capacity

Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.7 kg

Spare Parts

Carbon Brush	1 617 000 515
Switch	1 617 200 532
Armature	1 619 P10 005
Coil	1 61/1 220 127

GBH 2-26 DRE



Cupacity	
Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	· 2 7 kg

Spare Parts

Carbon Brush 1 617 000 525 Switch 1 617 200 532

GBH 2-26 DFR



Capacity

Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.9 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 532
Tool Holder	1 617 000 895

GBH 2-28 DFV











Capacity

Power Input	: 820 W
Impact Energy	: 0 - 3.2 J
In Concrete	: 4-28 mm
In Steel	: 13 mm
In Masonry	: 68 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Weight	: 2.9 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 532
Tool Holder	1 617 000 895

GBH 3-28 DFR





Capacity

Power Input	: 800 W
In Concrete	: 28 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 3.6 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 127
Tool Holder	1 617 000 895

GBH 4-32 DFR









Сараспу	
Power Input	: 900 W
In Concrete	: 32 mm
In Steel	: Up to 13 mm
In Wood	: Up to 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Weight	: 4.7 kg

Spare Parts

Carbon Brush	1 614 321 079
Switch	1 617 200 127
Tool Holder	1 617 000 895

Rotary Hammer with SDS-Max

GBH 5-40 D (Also Available in 110V)









- apaoity	
Power Input	: 1,100 W
Rate Speed	: 170 - 340 rpm
Impact Energy	: 8.5 J
Chisel Positions	: 12
Impact Rate	: 1,500 - 2,900 bpn
Weight	: 6.8 kg

Spare Parts

Carbon Brush	1 617 014 138
Hammer Piston	1 619 P10 765
Armature	1 619 P10 769
Coil	1 619 P08 323

*GBH 8-45 D (Also Available in 110V)





Capacity

Power Input	: 1,500 W
Impact Energy	: 12.5 J
No-load Speed	: 0 - 305 rpm
Impact Rate	: 1,380 - 2,720 bpm
Weight	: 8.2 kg

Carbon Brush	1 617 000 A50
Armature	1 614 010 267
Coil	1 614 220 124

Dust Extractor

*GDE 68



Capacity

Drilling Diameter	: max. 68 mm			
Weight	: 0.325 kg			
Suitable for all drilling tools, e.g.				
GBH 4-32 DFR, GBI	H 5-40 DCE,			
GBH 8-45 DV				

*GDE 162



Capacity

Drilling Diameter	: max. 162 mm			
Weight	: 0.5 kg			
Suitable for all drilling tools, e.g.				
GBH 4-32 DFR, GBH 5-40 DCE,				
GBH 8-45 DV				

Spare Parts	
Sealing Profile	1 600 A00 1MJ
Bruch Bar	1 600 A00 1MK

Sealin	g Profile	1	600	A00	1MJ
Brush	Bar	1	600	A00	1NT

*GDE Max

Demolition Hammer

GSH 5 (SDS MAX)



GSH 500 MAX (Only Available in 110V)











Capacity

Drilling Diameter	: max. 16 mm
Maximum drilling depth	: 120 mm
Weight	: 0.520 kg

Suitable for GBH 2-20 D, GBH 2-24 D / DF, GBH 2400, GBH 2600, GBH 2-26 RE / DRE / DFR, GBH 2-28 DV / DFV, GBH 3-28 DRE / DFR, GBH 18 V-EC, GBH 36 V-LI / VF-LI

Spare Parts

Socket Pipe 1 600 A00 1PZ 1 600 A00 1JN

Capacity

: 0.750 kg Weight Suitable for GSH 5 CE, GSH 7 VC, GSH 11 VC, GBH 5-40 DCE, GBH 7-46 DE, GBH 8-45 DV, GBH 11 DE

Spare Parts

V-Block	1 600 A00 1W1
Index Turning Toolholder	1 600 A00 1R9
Brush Bar	1 600 A00 1LX

Capacity

Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
No-load Speed	: 27,000 rpm
Weight	: 5.6 kg

Spare Parts

Carbon Brush	1 617 014 138
Hammer Piston	1 619 P07 775
Armature	1 619 P10 090
Coil	1 619 P05 386

Capacity

Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Weight	: 5.6 kg

GSH 5 CE (*Also Available in 110V)

HEAVY DUTY







Power Input	: 1,150 W
Impact rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Weight	: 6.2 kg

Spare Parts

Carbon Brush	1 617 014 138
Armature	1 614 011 098
Stopping Device	1 612 300 036
Indexing Disk	1 610 290 076
Hammer Piston	1 617 000 A00

GSH 500 Gen 2




Capacity

Power Input	: 1,100 W
Impact rate	: 2,900 bpm
Impact Energy	: 7.8 J
Tool holder	: Hex (17 mm)
No-load Speed	: 2,900 rpm
Weight	: 5.6 kg

*GSH 9 VC (Also Available in 110V) GSH 11 E (Also Available in 110V)

















CONSTANT	SDS-max	MVib Cor
Сара	city	

Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s²
Weight	: 8.5 kg



GSH 16-30

HEAVY

Spare Parts	
Carbon Brush	1 617 000 A50
Armature	1 614 010 267





Capacity

Power Input	: 1,500 W
Impact rate	: 900 - 1,890 bpm
Impact Force	: 6 - 25 J
Weight	. 10 1 kg

Carbon Brush	1 617 000 A50
Armature	1 614 010 267
Coil	1 614 220 124

Spare Parts

Carbon Brush	1 617 014 126
Switch	1 617 200 048
Coil	1 607 000 C3V

*GSH 11 VC (Also Available in 110V)





Capacity		
Power Input	:	1,700 W
Impact Rate	:	900-1,700 bpm
Impact Force	:	23 J
Vibration Values Chiselling	:	8 m/s ²
Voltage	:	230 / 240 V
Frequency	:	50 / 60 Hz
Weight		11 / ka

Spare Parts

oparc i ai to	
Carbon Brush	1 617 000 A50
Armature	1 614 011 120
Coil	1 604 220 52F

GSH 14 C





Capacity	
Power Input	: 1,750 W
Impact Rate	: 1.900 bpm
Impact Force	: 28 J
Tool Holder	: Hex 22
Weight	. 1/1 kg





Capacity

Power Input	: 1,750 W
Impact rate	: 1,300 bpm
Impact Force	: 45 J
Weight	: 16.5 kg

Spare Parts

Carbon Brush	1 617 014 126
Hammer Piston	1 607 000 C3M
Armature	1 614 011 117
Switch	1 607 200 244
Coil	1 604 220 52M





Capacity

Power Input	: 2,000 W
mpact rate	: 1,000 bpm
mpact Force	: 69 J
Weight	: 29.5 kg

Carbon Brush	1 617 000 425
Armature	1 614 011 139

GGS 3000 L

GGS 5000 L

GGS 28 C



*GGS 28 LC (Also Available in 110V)











Capacity

Power Input	: 300 W
Collet	: 6 mm
Diameter (L x H x W)	: 360 x 80 x 80 mm
No-load Speed	: 28,000 rpm
Voltage	: 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg



Capacity

Power Input	: 500 W
No-load Speed	: 33,000 rpm
Max. Collect Capacity	: 8 mm
Diameter (L x H x W)	: 360 x 80 x 80 mm
Voltage	: 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg



Capacity

Power Input	: 650 W
Max.Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	· 1 4 kg



Capacity

Power Input	: 650 W
Max.Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P08 203
Switch	1 607 200 146
Coil	1 610 DO0 925

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P08 212
Switch	1 607 014 146
Coil	1 610 PAQ 888

Spare Parts

Carbon Brush	1 607 014 176
Armature	3 607 030 476
Switch	1 607 200 199
Coil	3 607 030 475

Spare Parts

Carbon Brush	1 607 014 176
Armature	3 607 030 476
Switch	1 607 200 199
Coil	3 607 030 475

*GGS 6 S



Angle Grinder

GWS 060

GWS 6-100 (Only available in 110V)

GWS 700















Capacity

Power Input	: 1,200 W
Grinding Points (Diameter)	: Max. 125 m
No-load Speed	: 6,800 rpm
Weight	: 3.9 kg





ш	ELECTRONIC	
Сар	acity	

Weight

Oupacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Spindle	: M10
Disc Dia.	: 100 mm

: 1.6 kg





oupuoit)	
Power Input	: 670 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 11,000 rpm
Weight	· 1 8 kg



Power Input	: 670 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 11,000 rpm
Weight	: 1.8 kg

⊹•⊚ Capacity

oupuoity	
Power Input	: 710 W
No-load Speed	: 12,000 rpm
Disc Diameter	: 100 mm
Grinding spindle thread	: M10
Weight	: 1.7 kg

Spare raits	
Carbon Brush	3 607 014 012
Armature	1 604 010 474
Switch	1 607 200 064

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P01 844
Switch	1 607 200 179
Coil	1 619 P12 316

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 604 010 626
Switch	1 607 200 179
Coil	1 604 220 328

GWS 750-100





GWS 9-100 P (Also Available in 110V)







HEAVY **DUTY**



GWS 900-100 S











Capacity

Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Weight	· 1 8 kg



Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Dia.	: 70 mm
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg



Capacity

i ower input	. 500 **
Grinding / Cutting	
Disc Diameter	: 100 mm
No-load Speed	: 11,000 rpm
Grinding Spindle Thread	: M 10
Weight	: 1.8 kg

. 000 W









	Pu.	٠.٠,	١
Pov	ver	Inni	

Power Input	:	900 W
Grinding / Cutting		
Disc Diameter	:	100 mm
Grinding Spindle Thread	:	M10
No-load Speed	:	2,800 - 11,000 rpm
Weight	:	1.9 kg

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P08 234
Coil	1 619 P08 334

Carbon Brush 1 607 031 223

Angle Grinder

GWS 11-125 P (Only available in 110V)

HEAVY DUTY





Capacity

Power Input	: 1,100 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.2 kg

GWS 12-125 S

HEAVY DUTY





Capacity

Power Input	:	1,200 W
No-load Speed	:	2,800 - 11,000 rpn
Grinding Spindle Thread	:	M14
Disc Diameter	:	125 mm
Woight		22 kg

GWS 13-125 CI

HEAVY DUTY













Capacity

Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.3 kg

Spare Parts

Carbon Brush	1 607 000 V37
Bearing Flange	1 607 000 448
Gear Sets	1 607 000 V44

GWS 17-125 CI

HEAVY DUTY









- apacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	· 2.4 kg

Spare Parts

Carbon Brush	1 607 000 V37
Bearing Flange	1 607 000 448
Gear Sets	1 600 A00 22W

GWS 17-150 CI















Capacity

Power Input	: 1,700 W
No-load Speed	: 9,300 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 150 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.4 kg

Spare Parts

Carbon Brush	1 607 000 V37
Bearing Flange	1 607 000 449
Gear Sets	1 607 000 A4P

GWS 18-125 L















Capacity

Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.5 kg

GWS 18-150 L

















Power Input	: 1,800 W
No-load Speed	: 10,000 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 150 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.6 kg

*GWS 20-180 (Only Available in 110V)







Capacity

Power Input	: 2,000 W
Grinding / Cutting	
Disc Diameter	: 180 mm
Wire Cup Brush Diameter	: 100 mm
No-load Speed	: 8,500 rpm
Weight	· 4 2 kg

Spare I alts	
Carbon Brush	1 607 014 171
Armature	1 604 011 252
Coil	1 604 220 380
Curitob	1 607 000 067

GWS 2200-180

GWS 2200-230

GWS 24-180 JZ



GWS 24-230 JZ
















Power Input	: 2,200 W
Grinding / Cutting	
Disc Diameter	: 180 mm
Grinding Spindle Thread	: M14
No-load Speed	: 8,500 rpm
Weight	: 5 kg



Capacity	
Power Input	: 2,200 W
No-load Speed	: 6,500 rpm
Disc Diameter	: 230 mm
Grinding Spindle Thread	: M14
Weight	: 5 kg











	THOO MONTH
Cap	acity

Power Input	: 2,400 W
No-load Speed	: 6,500 rpm
Disc Diameter	: 230 mm
Grinding Spindle Thread	: M14
Weight	: 5.5 kg

Angle Grinder

GWS 30-180 B











-		
Ca	pacity	
_		

Power Input	: 2,800 W
No-load Speed	: 8,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 180 mm
Wire Cup Brush Dia.	: 100 mm
Weight	: 5.7 kg





CONTROL PROTECTION PROTECTION	u
Capacity	
Power Input	
No-load Speed	

GWS 30-230 B

HEAVY DUTY

NEW!

Oupucity	
Power Input	: 2,800 W
No-load Speed	: 6,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 230 mm
Wire Cup Brush Dia.	: 100 mm
Weight	: 5.9 kg

GWX 9-125 S

HEAVY DUTY

GWX 14-125

HEAVY DUTY







Capacity

Power Input	: 900 W
No-load Speed	: 2,800 - 11,000 rpm
Switch	: 2-way
Disc Diameter	: 125 mm
Wire Cup Brush Dia.	: 75 mm
Weight	: 2.1 kg









Capacity

Power Input	: 1,400 W
No-load Speed	: 11,000 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.3 kg

Impact Wrench

*GDS 18 E (Also Available in 110V)



ш	ELECTROMIC
Can	acity

Capacity	
Power Input	: 500 W
Bolts KW	: M6 - M18
Torque	: 70 - 250 Nm
No-load Speed	: 500 - 1,300 rpm
AAT - 1 - It is	2.21

*GDS 30







Capacity

Power Input	: 920 W
Torque	: 500 - 1,000 Nm
Toolholder	: 1" External square
No-load Speed	: 860 rpm
Weight	· 7.3 kg

Stirrer / Mixer Drill

GRW 12 E







Capacity

Power Input	: 1,200 W
Rated Torque	: 12,0 Nm
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Weight	: 5.3 kg

Spare Parts	
Carbon Brush	1 607 014 17A
Armature	1 604 010 B1U
Mixer Attachment	3 609 201 036

Shear

*GSC 2.8







Capacity

: 500 W
: 2.8 mm
: 3.5 mm
: 2,400 rpm
: 2.7 kg

Spare Parts

Carbon Brush	1 619 PA2 438
Tool Holding Fixture	1 619 PA2 453
Armature	1 619 PA2 436
Coil	1 619 PA2 435

Spare Parts

Carbon Brush 3 607 014 012

Coil 1 604 220 235

Spare Parts

Upper Blade 2 608 635 065 Lower Blade 2 608 635 042

Bench Grinder

GBG 35-15







Capacity

Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20







Canacity

Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	. 17 kg

Marble Cutter

GDC 140





Capacity

Power Input	: 1,400 W
Cutting Depth	: 35 mm
Cutting Diameter	: 115 mm
No-load Speed	: 13,200 rpm
Weight	: 2.9 kg

Nibbler

*GNA 2.0







Capacity

Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Speed	: 2,400 Stroke/min
Weight	· 2 0 kg

Carbon Brush	1 607 031 228
Die Holder	2 608 639 900
Straight & Curve	
Cutting Punch	2 608 639 013

GSA 120 (Also Available in 110V)

GKS 140

GTB 650





Capacity

Power Input	: 1,400 W
Cutting depth: In Wood	: 184 mm
Saw Blade Bore Diameter	: 20 mm
No- l oad Speed	: 6,200 rpm
Base Plate	: 290 x 150 mm
Cutting depth (90°/45°)	: 64 / 45 mm
Weight	. 3 7 kg



Сараспу	
Power Input	: 650 W
No-load Speed	: 0 - 5,000 rpm
Rated Speed	: 0 - 5,200 rpm
Torque, max.	: 12 Nm
Bit Holder	: 1/4" internal hexagon
Weight	: 1.4 kg





Capacity

- upuo.tj	
Power Input	: 1,200 W
Stroke Rate	: 0 - 3,000/min.
Stroke Length	: 29 mm
Blade Change	: SDS
Cutting Depth in Wood	: 220 mm
in Metal	: 20 mm
Weight	· 3 7 kg





Capacity

Power Input	: 500 W
In Wood	: 70 mm
In Steel	: 6 mm
No-load Stroke Rate	: 1,450 - 3,200 spm
Weight	: 2.1 kg

GST 750







Capacity

Power Input	: 520 W
In Wood	: 75 mm
In Steel	: 6 mm
No-load Stroke Rate	: 800 - 3,200 spm
Weight	: 2.1 kg

GST 90 BE



Ca	pa	ci	tν

Power Input	: 650 W
In Wood	: 90 mm
In Aluminium	: 20mm
No-load Stroke Rate	: 500 - 3,100 spm
Weight	: 2.6 kg

Cut off Machine

GCO 220 (Also available in 110V)





Capacity

Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Blade Bore Size	: 25.4 mm
Weight	: 15 kg

GCO 14-24 J (Soft Start)



Capacity

Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
/oltage	: 230 / 240 V
Weight	: 18.1 kg

Spare Farts	
Carbon Brush	1 607 014 171
Armature	1 609 B03 638
Coil	1 609 B00 149

Table Saw

GTS 10 J













Power Input : 1,800 W Saw Blade Diameter : 254 mm : 47° L / 2° R Bevel Setting Cutting Capacity (Right) : 460 : 210

Spare Parts

Weight

Carbon Brush	2 610 018 332
Coil	1 609 203 K86
Armature	1 619 P03 278
Switch	2 610 016 997

GTS 254





Capacity

Power Input	: 1,800 W
Saw Blade Diame	ter : 254 mm
No-load Speed	: 4,300 rpm
Incline Setting	: 45° L / 0° R
Cutting Height 90	° : 80 mm
45	° : 55 mm
Weight	· 24.4 kg

Compound Mitre Saw

GCM 10 MX



Capacity

Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Weight	: 13.5 kg

Spare Parts

oparo i arto		
Carbon Brush	1 619 PA7 057	
Armature	1 619 PA7 056	
Coil	1 619 PA6 835	

*GCM 12 GDL



Capacity

Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Weight	: 32.1 kg

: 26 kg

Compound Mitre Saw

GCM 216



Capacity

Capacity	
Power Input	: 1,300 W
Saw Blade Diameter	: 216 mm
Arbour Size	: 30 mm
No-load Speed	: 4,800 rpm
Max. Mitre	: 47° L / 47° R
Cutting Capacity	: 60 x 123 mm
Weight	: 10.1 kg

Mitre Saw Stand

*GTA 2600



Capacity

Length of work bench	: 2,600 mm
Dimensions of table	
when folded up	: 820 mm
Height of work bench	: 947 mm
Max. Load Capacity	: 160 kg
Weight	: 19.6 kg

Table Saw Stand

*GTA 600 (0 601 B22 002)



Capacity

Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Planer

GHO 10-82 (*Also Available in 110V)









Capacity

Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 3.0 mm
No-load Speed	: 16,500 rpm
Weight	: 2.5 kg

Spare Parts

Carbon Brush	1 607 031 222
Planing Knife	2 609 110 357
V-Be l t	2 609 100 410

GHO 6500



	Сарасну	
	Power Input	: 650 W
	No-load Speed	: 16,500 rpm
	Adjustable Chip Thickness	: 0 - 2.6 mm
	Adjustable Rebating Depth	: 0 - 9 mm
	Diameter (L x H x W): 280:	x 140 x 158 mm
	Weight	· 2 8 kg

Spare Parts

Planing Knife 2 609 110 357 2 609 100 410

Foam Cutter

GSG 300





Capacity

Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Weight	: 1.6 kg

Spare Parts

Carbon Brush 1 607 014 17J 2 608 000 908 Base Plate 2 607 200 286 Switch

Eccentric Sander

GEX 125-1 AE

HEAVY DUTY







Capacity

Power Input	: 250 W
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
No-load Speed	: 7,500 - 12,000 rpm
Weight	: 1.3 kg

Spare Parts

Carbon Br	ush 2	609	120	199
Switch	1	607	200	190
Dust Cont	ainer 2	609	199	176
Bearing Fl	ange 2	609	100	862
Backing Pa	ad 2	609	100	900

Orbital Sander

GSS 140



Capacity

Power Input	: 220 W
No-load Speed	: 14,000 rpm
Orbital Stroke Rate	: 28,000 opm
Orbit Diameter	: 1.5 mm
Weight	: 1.2 kg

GSS 2300



Capacity

Power Input	: 190 W
No-load Speed	: 12,000 rpm
Orbital Stroke Rate	: 24,000 opm
Orbit Diameter	: 2 mm
Weight	: 1.5 kg

*GSS 280 AE

HEAVY DUTY



Capacity

Power Input	: 330 W
Oscillating Circuit	
Diameter	: 2.4 mm
Orbit Rate	: 11,000 - 22,000 opm
Sanding Plate	: 114 mm
No-load Speed	: 5,500 - 11,000 rpm
Weight	: 2.6 kg

Spare Parts

Carbon Brush 1 607 031 222 Sander Plate 2 608 000 168 Switch 2 607 200 260

GSS 280 AVE (Indent)

HEAVY





Capacity

Power Input	: 350 W
Oscillating Circuit	
Diameter	: 2.4 mm
Orbit Rate	: 16,000 - 22,000 opm
Sanding Plate	: 114 mm
No-load Speed	: 8,000 - 11,000 rpm
Weight	· 2 75 kg



Carbon Brush 1 607 031 222

Polisher

GPO 12 CE







Capacity	
Power Input	: 1,250 W
Polishing Disc Diameter	: 180 mm
Thread of	
Polishing Spindle	: M14
Tool Length	: 450 mm
No-load Speed	: 750 - 3,000 rpm

: 2.5 kg

Spare Parts

Weight

Carbon Brush	1 607 014 176
Speed Governor	1 607 233 256
Switch	1 619 P09 841
Armature	1 619 P09 115

Blower

GBL 620

GBL 82-270

HEAVY DUTY

Capacity

Air Volume

GOF 130

Weight

Power Input

No-load Speed

Belt Sander

GBS 75 A







: 950 W

: 180 mm


2.3 kg

M14 / M16

: 600 - 2,100 rpm



Capacity





: 820 W

: 1.8 kg

: 0 - 16,000 rpm

: 0 - 4.5 m³ /min



Capacity

Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Weight	: 3.2 kg

Spare Parts

Carbon Brush 1 607 031 222 2 604 736 010

Hot Air Gun

GHG 18-60



Capacity

Power Input

Adaptor Size

Variable Speed Weight

Diameter

Rubber Sanding Plate,







Mini Router / Trimmer

GKF 550





Capacity

Power Input	: 1,800 W
Temperature	: 50 / 400 / 600°C
Air Flow	: 250 / 350 / 500 I/min
Weight	: 0.52 kg









Capacity : 2,000 W Power Input : 50 - 630°C : 150 / 300 / 500 I/min Temperature Air Flow : 0.65 kg Weight







Capacity

Power Input	: 1,300 W
No-load Speed	: 11,000 - 28,000 rpm
Bit Holder	: 1/4" & 8 mm
Stroke	: 55 mm
Weight	: 3.5 kg





Weight

Capacity	
Power Input	: 550 W
Collet	: 1/4"
No-load Speed	: 33,000 rpm

: 1.4 kg

Wet & Dry Vacuum Cleaner

GAS 15 / 15 PS



Сараспу	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 I/sec
Max. Vacuum Pressure	: 22 kPa
Weight	· 6 kg

- Semi-automatic filter cleaning system,
- 2 in 1: vacuuming and blowing





Capacity	
Power Input	: 1,250 W
Container (gross/net)	: 25 / 21 litre
Air Flow Max.	: 65 I /sec
Max. Vacuum Pressure	: 200 mbar
Weight	. 9 kg

- Semi-automatic filter cleaning system,
- 2 in 1: vacuuming and blowing





Dust Free Solution

Dust Extraction Guard (For 4" Grinder) 2 608 000 629	6
Dust Extraction Guard (For 5" Grinder) 2 605 510 224	
GDE 125 FC-T (For 5" Grinder) 1 600 A00 3DK	
GDE 24 (GSB & GBH up to 24 mm ø) 1 600 A01 M9V	
GDE 68 (Up to 60 mm ø) 1 600 A00 1G7	
GDE 162 (Up to 162 mm ø) 1 600 A00 1G8	©
GDE 16 1 600 A00 15Z	912
GDE MAX (5 kg ~ 11 kg Demolition Hammer) 1 600 A00 1G9	
GDE HEX (16 kg Demolition Hammer) 1 600 A00 1GA	
GDE 18 V-16 Dust Extractor (for GBH 18 V-26 & GBH 187 LI) 1 600 A00 51M	
GDE 12 Dust Extractor (for GBH 185 LI) 1 600 A02 BW0	
Dust Adaptor (GKS 600 / 7000) 2 608 000 563	

GIC 120 C

GLM 40 GLM 50-23 G











Capacity

Disp l ay Size	: 3.5"
Display Resolution	: 320 x 240 px
Dia.of Camera Head	: 8.5 mm
Length of Camera Cable	: 120 cm
Batteries	: 4 x 1.5V LR6(AA)
	/ 10.8 V or 12 V
	Li-ion Battery



GLM 150 C

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.15 - 40 m
Measuring Accuracy	: ± 2 mm
Memory Capacity	: 10
Measuring Units	: m/cm, ft/inch
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg



GREENLASER Technology

Capacity

oupuoity	
Laser Diode	: 515 nm, <1mW
Measuring Range	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Tilt Sensor Range	: 0° - 360°
Measuring Units	: m/cm/mm, ft/inch
Batteries	: 2 x 1.5 V LR6 (AA)
Memory Capacity	: 30
Weight	: 0.2 kg



GLM 50-27 CG





Capacity

GMS 120

oupacity	
Laser Diode	: 515 nm, <1mW
Measuring Range	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Tilt Sensor Range	: 0° - 360°
Measuring Units	: m/cm/mm, ft/inch
Batteries	: 2 x 1.5 V LR6 (AA)
Memory Capacity	: 30
Weight	: 0.2 kg

Detector

D-tect 120

GLM 100-25 C

: 0.64 kg



Weight



















Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.05 - 100 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m/cm, ft/inch
Batteries	: Lithiun-lon
Voltage	: 3.7 V
Weight	· 0 14 kg





Capacity

Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.08 - 150 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m/cm, ft/inch
Batteries	: 3 x 1.5 V LR06 (AA)
Tilt Sensor Range	: 0° - 360°
Maight	. 0.22 kg

Capacity

Detection Mode	: Universal, Concrete, Drywall
Detection Object	: Ferrous metals,
non-ferrous metals	, live cables, wooden
objects and *water	-filled plastic pipes
Max. Detection Depth	n: 120 mm
Accuracy	: ± 10 mm
Power Supply	: 4 x 1.5 V LR6(AA)
Weight, approx	: 0.5 kg

Capacity

Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

Thermo Detector

GIS 1000 C









GCL 2-15 G









Capacity

Storage Medium Weight

Resolution of	
Infrared Sensor	: 635 nm, <1mW
Working Range	: 0.1 - 5 m
Temperature Range	: -40°C to + 1000°C
Measuring Accuracy	y: ± 1.0°C (0°C - 100°C
Batteries : 4 x 3	1.5V LR6(AA) /
10.8	V or 12V Li-ion Battery
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 Images

: 0.56 kg





Capacity

Resolution of	
Infrared Sensor	: 160 x 120
Temperature Range	: - 10°C to + 400°C
Measuring Accuracy	: ± 3.0°C
Batteries	: 4 x 1.5V LR6(AA) /
	10.8V or 12V Li-ion
	Battery
Weight	· 0 54 kg





aser diode	:	635 nm
aser Class	:	2
perating Temperature	:	- 5°C - 50°C
torage Temperature		-20°C70°C

: 2 x 1.5 V LR6(AA) Batteries Weight : 0.2kg







Capacity

plumb point : 10 m (up and down) Self-leveling range : ± 4° Leveling Accuracy $:\pm 0.3 mm / m$: 1/4", 5/8" : 3 x 1.5 V LR6(AA) : 0.49 kg Tripod Mount Batteries Weight

GLL 30 G





Weight



Capacity

Laser Diode : 500 - 540 nm, <5mW Working Range : 10 m Leveling Accuracy : ± 0.8 mm / m Self-levelling Range : ± 4° Tripod Mount : 1/4" Batteries 2 x 1.5 V LR6(AA)

0.25 kg

GCL 2-50 CG



$\mathbb{A}^2 \otimes$





Capacity

Laser diode: Line : 500 - 540 nm, < 10 mW Point: 630 - 650, < 1 mW Working Range : 20 m (50 m with Receiver LR 7) Working Range of plumb point : 10 m (up and down) Leveling Accuracy : ± 0.3 mm / m Self-levelling Range: ± 4° : 1/4" Tripod Mount

: 4 x 1.5V LR6(AA) / **Batteries** 10.8V or 12V Li-ion Battery) : 0.58 kg

Weight

GLL 3-15 X



Capacity

Laser Diode : 630 - 650 nm, <1mW Working Range : 15 m Working range of plumb point : 5 m : ± 0.2 mm / m Leveling Accuracy Self-levelling Range : ± 3° Tripod Mount 5/8" on rotation mount Batteries 4 x 1.5 V LR6(AA)

: 0.54 kg

Spare Parts

Weight

Rotation mount 1 618 C01 11X

GLL 5-50 X



Capacity

Working Range : 15 m Working Range With Receiver LR 6 / LR 7: 5 - 50 m Working Range of Plumb Point : 5 m Leveling Accuracy* : ± 0.2 mm / m Self-levelling Range: ± 3° Tripod Mount : 5/8" on rotation mount Batteries : 4 x 1.5 V LR6(AA)

: 0.54 kg


Spare Parts

Weight

Rotation mount 1 618 C01 11X

GLL 3-80

GLL 3-60 XG







Capacity : 500 - 540 nm, <10mW Laser Diode Working Range : up to 30 m Working Range with Receiver, Value : 60 m Leveling Accuracy : ± 0.3 mm / m Self-levelling Range : ±3°

Tripod Mount : 1/4" & 5/8" **Batteries** : 4 x 1.5 V LR6(AA) : 0.82 kg Weight

GLL 3-80 CG





GREENLASER **€** Technology

Capacity : 500 - 540 nm, <10mW Laser Diode Working Range : 30 m Working Range

With Receiver LR 7: 120 m (diameter) Leveling Accuracy : ± 0.2 mm / m Self-levelling Range: ±4°

: 4 x 1.5V LR6(AA) / Batteries 10.8V or 12V Li-ion Battery Tripod Mount : 1/4" & 5/8"

: 0.9 kg

Point Laser

GPL 5G



📤² 🐼

Capacity Laser Diode : 500 - 540 nm, <1mW Operating Temperature: -10 - 45°C Storage Temperature : -20 - 70°C Working Range : up to 30 m Accuracy : ± 0.35 mm / m Self-levelling Range : ± 4° Tripod Mount : 1/4' : 2 x 1.5 V LR6(AA) Batteries Weight : 0.35 kg

Rotation Laser Level

: 630 - 650 nm, <10mW

: 30 m

: ± 0.2 mm / m

4 x 1.5 V LR6(AA)

: 1/4" & 5/8"

: 0.82 kg

Receiver LR 6 / LR 7 : 120 m (diameter)

GRL 350 HV

(8)

(S)

Capacity

Laser Diode

Working Range

Working Range With

Self-levelling Range : ±4°

Leveling Accuracy

Tripod Mount

Plane

Weight

Batteries

Angle Measurer

*GAM 220





	Laser Diode	:	630 - 650 nm, <5mW
	Working Range	:	up to 60 m
	Self-Leveling Range	:	± 0.5°
	Tripod Mount	:	5/8"
	Batteries	:	2 x 1.5V LR20(D)
	Weight		1 8 kg

Capacity

Measurement Range : 0 - 220° Electronics Measurement Accuracy, Angles : ±0.19 Electronics Measurement : ±0.05° Accuracy, Vials : 4 x 1.5V | R6(AA) or Power Supply 4 x 1.2V HR6(AA) Weight : 1.3 kg

Digital Inclinometer

*GIM 60 L

Weight



Capacity

Weight

Laser Diode : 650nm, <1mW Measurement Range : 0° - 360° Electronics Measurement Accuracy 0° / 90° : ±0.05° Electronics Measurement Accuracy at 1° / 89° : ±0.1° Laser Working Range : 30 m : ±1mm / m Laser Accuracy horizontal levelling : 4 x 1.5V LR6(AA) or Batteries 4 x 1.2V HR6(AA)

*GIM 60



Capacity

Measurement Range: 0 - 360° (4x90°) Electronics Measurement : ±0.05° Accuracy 0° / 90° Electronics Measurement Accuracy at 1° / 89° : ±0.2° Electronics Measurement : ±0.057° = ±1 mm/m Accuracy, Vials Power Supply : 1 x 9 V 6LR61 : 4 x 1.5V LR6(AA) or **Batteries** 4 x 1.2V HR6(AA) Weight : 0.77 kg

Digital Inclinometer

*GIM 120



Measurement Range	: 0 - 360°
Electronics Measurer	nent
Accuracy 0° / 90°	: ±0.05°
Electronics Measurer	nent
Accuracy at 1° / 89°	: ±0.2°
Electronics Measurer	nent

: ±0.057° = ±1 mm/m : 4 x 1.5V LR6(AA) or 4 x 1.2V HR6(AA) Accuracy, Vials Power Supply Weight : 1.4 kg

Tripod

BT 150



Capacity

Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg

For DLE, GLM, GLL & GPL category



Capacity

Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg

BT 160



Capacity

Work Height	: 97 - 160 cm
Tripod Thread	: 5/8"
Weight	: 4.1 kg

For GRL & GOL category

Telescopic Pole

*BT 350



Laser Receiver

LR 6



Rotation Mount

RM 3



Capacity	
Max Height	: 140 - 350 cm
Weight	: 2.5 kg

For GLL & GPL category



Working Range	:	5 - 50 m
Measurement Ac	curacy, Fine:	± 1 mm
Measurement Acci	uracy, Rough:	± 3 mm
Compatible with	Red Laser:	GLL 5-50 X
Power Supply	: 2 X 1.5	V LR03 (AAA)
Weight		0.12 kg

Capacity

working Range	: 5 - 50 M
Measurement Accur	racy, Fine: ± 1 mm
Measurement Accura	cy, Rough: ± 3 mm
Compatible with Re	ed Laser : GLL 5-50 X
Power Supply	: 2 X 1.5 V LR03 (AAA)
Weight	: 0.12 kg

Capacity

Working Range	: 5 - 50 m
Measurement Accur	acy Fine : ± 1 mm
Measurement Accur	acy, Rough: ± 3 mm
Compatible with Gre	een and Red Laser
Power supply	: 2 x 1.5 V LR6 (AA)
Weight, approx.	: 0.15 kg



Capacity

Working Range	
(with RC 2)	: 20 m
Batteries	: 2 x 1.5 V LR03 (AAA)
Weight	: 0.46 kg

Universal Holder

BM 1



Capacity

Tripod T	hread		: 1	1/4	"
Weight			: 1	0.5	kg
Fam OLL	ODI (CLBA	4-		







High Pressure Washer

EasyAquatak 100





Capacity

Motor Output	: 1,100 W
Max. Pressure	: 100 bar
Max. Flow Rate	: 300 l /h
Max. Temp	: 40°C
Hose Length	: 3 m PVC
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.0 kg

EasyAquatak 110



Capacity

Oupacity	
Motor Output	: 1,300 W
Pressure	: 110 bar
Flow Rate	: 330 l /h
Max. Temp	: 40°C
Hose Length	: 3 m PVC
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.8 kg

Spare Parts

Trigger	F 016 F05 280
Hose (6m)	F 016 800 360
Evtension Hose (6m)	F 016 800 361
Lance	F 016 F05 017
3 in 1 Nozzle	F 016 800 508

UniversalAquatak 125



Capacity

Oupacity	
Motor Output	: 1,500 W
Pressure	: 125 bar
Flow Rate	: 360 I /h
Max. Temp	: 40°C
Hose Length	: 5 m PVC
Weight	: 6.8 kg

UniversalAquatak 130





ш

Capacity	
Motor Output	: 1,700 W
Pressure	: 130 bar
Flow Rate	: 380 I /h
Max. Temp	: 40°C
Hose Length	: 6 m PVC
Weight	: 7.8 kg

AdvancedAquatak 150



Capacity

Motor Power	: 2,200 W
Pressure	: 150 bar
Flow Rate	: 480 l /h
Max. Temp	: 40°C
Hose Length	: 8 m PU
Weight	· 21 1 kg



High Pressure Cleaner

GHP 5-13 C





Capacity

Capacity	
Motor Power	: 2,300 W
Maximum Pressure	: 140 Bar
Maximum Flow Rate	: 520 I/h
Hose Length	: 8 m
Weight	· 16 5 kg

Spare Parts

oparo i arto	
Handle	F 016 L72 097
Jet Pipe	F 016 L72 098
Hose (9m)	E 016 E04 523

GHP 6-14





Motor Power	: 2,600 W
Maximum Pressure	: 150 Bar
Maximum Flow Rate	: 650 l/h
Hose Length	: 10 m
Weight	: 25.6 kg

opare i ai c	-
Handle	F 016 L72 097
Jet Pipe	F 016 L72 179
Hoso (9m)	E 016 E04 523



Grass Shear

Easy Shear



Capacity

Weight

Battery Type : Lithium-ion Battery Voltage : 3.6 V Works with Battery Capacity: 1.5 Ah : up to 40 mins No-load Runtime Battery Charge Time : 3 h Shrub Blade Length : 12 cm Grass Shrub Width : 8 cm Tooth Spacing : 8 mm Area Cut per Battery Charge, Max : 22 m²

: 0.530 kg





Grass Shear Blade, 120 mm (F 016 800 589)



Grass Shear Blade, 80 mm (F 016 800 588)

Grass Trimmer





Capacity

Motor Power : 280 W : 23 cm **Cutting Size** : Semi-Auto Spool : 12.500 rpm **Cutting System Cutting Speed**

: 1.6 mm x 4 m Spool Spool P/N : F 016 800 569 Weight :2.0 kg

Tool Dimensions

(L x W x H) : 1160 x 280 x 320 mm

Weight Packed :2.6 kg







Lawn Mower

AHM 38 G





Capacity

Min Cutting Height : 15 mm Cutting Height : 15 - 43 mm Cutting Width : 38 cm : 5 laded Cylinder Blade Roller : Yes Self Propelling : No : Hand Push Fuel Type Tool Dimensions (L x W x H) 540 x 490 x 380 mm Grass Box Capacity : 25 Litres : 0 600 886 160 Grass Box P/N

: 7.5 kg





Lawn Mower



Weight



Blade Width

Blade P/N

Weight

Motor Motor Power : 1,200 W Torque : 13 Nm Cutting Height Grass Combs : 20 - 60 mm, 3-fold : Yes Grass Box Capacity : 31 L Handle Type : Standard Integrated Carrying Handles: No Cutting System : Rotary Blade Power Cable : 10 m

: 32 cm

: 6.8 kg

: F 016 800 340



Replacement Blade for Rotak 32-12 (F 016 800 340))





Bosch 110V Power Tools

Model	Description
GBH 2-23 RE	Rotary Hammer SDS Plus
GBH 2-26 RE	Rotary Hammer SDS Plus
GBH 5-40 D	Rotary Hammer SDS Max
*GBH 8-45 D	Rotary Hammer SDS Max
GBL 800 E	Blower
GCO 220	Cut Off Saw
*GDM 13-34	Marble Cutter
GDS 18 E	Impact Wrench
GGS 28 LC	Straight Grinder
GHG 20-63 kit	Heat Gun
*GHO 10-82	Planer
*GSA 120	Sabre Saw
GSB 10 RE	Impact Drill, 10 mm Chuck
GSB 16 RE	Impact Drill, 13 mm Chuck
GSH 5 X Plus	Breaker (17 mm Hex Shank)
*GSH 5 CE	Breaker SDS Max
GSH 9 VC	Breaker SDS Max
GSH 11 E	Breaker SDS Max
GSH 11 VC	Breaker SDS Max
GKS 190	7" Circular Saw
GST 25 M	Jigsaw
GWS 6-100	4" Grinder (100+6)
*GWS 11-125 P	5" Grinder Paddle / DMS
GWS 20-180	7" Grinder



Carbon Brush Guide

Effective 1st January 2023

Model	Part No.	Price (SGD)
GWS 060 / 6-100, GWS 750-100, GWS 900-100 / S, GGS 3000 L / 5000 L, GWS 9-100 P, GWX 9-125 S	1 607 031 223	\$ 3.50
GSR 180-LI, GSB 180-LI	1 607 000 CZ1	\$ 4.00
GBH 2-26 RE / DRE / DFR, GBH 2-24 RE / DRE / 2-23 REA, GBH 3-28, DFR, GBH 220, GSB 20-2 RE / 21-2 RCT	1 617 000 525	\$ 6.00
GSH 5 X, GSH 500, GBH 5-40 D, GSH 5 CE, GSH 5, GSH 388, GSH 388 X, GBH 5-38 D	1 617 014 138	\$ 10.00
GSH 10 C, GSH 11 E, GSH 16-30	1 617 014 126	\$ 10.00
GWS 20-180 / 230, GCO 220 / 2000, GCM 10 M, GCD 12 JL, GCO 14-24 J, GWS 2200, GWS 24-180 JZ / 230 JZ	1 607 014 171	\$ 10.00
GWS 8-100 Z, GGS 28 C / LC, GPO 12 CE, GWS 11-125 CI, GWS 14-125	1 607 014 176	\$ 7.00
GWS 11-125 P, GWS 13-125 CI, GWS 17-125 CI, GWS 17-150 CI, GWS 15-125 L, GWS 18-125 L / 150 L	1 607 000 V37	\$ 8.50
GST 80 PBE, GST 25 M, GNA 2.0, GGS 27, GGS 27 L, GST 60 PBE, GSC 2.8	1 607 031 228	\$ 7.00
GSA 120, GKS 7000, GK S600	1 619 P10 063	\$ 6.50
GWS 7-100, GWS 7-100 T, GWS 7-100 ET, GOP 25 CE, GOP 30-28	1 619 P02 870	\$ 4.00
GBL 620, GBL 82-270, GBL 800 E	1 604 321 129	\$ 6.00
GEX 125-1 AE, GSS 230, GSS 1400	2 609 120 199	\$ 10.00
GBM 13 HRE, GSB 20-2 RE (Old), GBH 2-20 RE, GHO 10-82, GBS 75 A, GGS 280 AE	1 607 031 222	\$ 6.50
GBM 350	1 619 P20 086	\$ 5.00
GSB 16 RE (3 601 B28 1L0-New) GBM 10 RE/13 RE, GSB 10 RE/13 RE, GTB 650	2 610 391 290	\$ 5.50
GSB16 RE (3 601 B18 1L0-Old)	2 604 337 059	\$ 10.00
GST 65, GST 65 E, GST 54, PST 54, ST 350	2 604 321 919	\$ 7.00
GTS 254	1 619 PB6 280	\$ 6.00
GBH 4-32 DFR	1 614 321 079	\$ 13.00
GAS 15, GAS 15 PS, GAS 12-25	1 619 PA7 345	\$ 8.00
GAS 11-21	1 609 203 A00	\$ 18.00
GDR 14.4V-LI, GDS 14.4V-LI, GDX 14.4V-LI, GDR 18V-LI, GDS 18V-LI, GDX 18V-LI	2 609 199 169	\$ 12.00
GSA 1100 E, GSA 1300 PCE	2 610 956 917	\$ 6.00
GBM 16-2 RE, GBM 23-2, GBM 23-2 E, GGS 6, GGS 6 S, GPO 12 E, GDS 30, GRW 11 E	3 607 014 012	\$ 14.00
GBH 8-45 D, GSH 9 VC	1 617 000 A50	\$ 20.00
GKS 190 (3 601 F23 0L0-New)	1 619 P06 346	\$ 12.00
GBH 7-45 DE, GBH 7-46 DE	1 617 014 135	\$ 18.00
GBH 2 SR, GBH 2-20 SRE, GAH 500 DSE	1 607 031 230	\$ 7.00
GBH 4 DFE, GBH 4 DSC	1 617 014 124	\$ 8.00
GSH 4, GBH 5 DCE	1 607 031 225	\$ 14.00
GSG 300	1 607 031 223	\$ 16.00
GCM 10 S, GCM 10 MX, GCM 10	1 609 203 L02	\$ 17.00
GBH 180-LI	1 619 P14 345	\$ 9.00
GDM 121	1 619 PA4 025	\$ 4.00
GDS 18 E	1 619 PA2 438	\$ 13.00
GMR 1	2 609 120 149	\$ 11.00
GBH 36V-LI	1 617 014 142	\$ 12.00
GSR 36V-LI	2 607 034 904	\$ 13.00
GKF 550	1 619 PB3 047	\$ 5.00
GSB 550 RE	1 619 PA1 407	\$ 9.00
GSS 2300	1 619 PA7 635	\$ 6.00
GST 90 BE	2 604 321 925	\$ 5.50
GOF 130	1 619 PB5 455	\$ 6.00
GDX 180-LI	1 607 014 18R	\$ 9.00
		-
GHO 6500	2 609 120 398	\$ 12.00
GSS 140	1 619 PB3 111	\$ 3.00
GST 700	1 619 P13 476	\$ 5.50
GPO 950	1 619 PB1 971	\$ 4.00
GTS 10 J	2 610 018 332	\$ 9.50
GCM 12 GDL	2 610 021 311	\$ 15.00
GBM 50-2	1 619 PB4 295	\$ 36.00
GSH 11 VC	1 617 000 750	\$ 22.00
GDC 140	1 619 P20 377	\$ 5.00
GKS 140	1 619 PB4 042	\$ 9.00
GBH 3·28 E	1 617 014 137	\$ 14.00
GDM 13-34	1 619 P06 304	\$ 6.00
GBM 32-4	3 604 321 034	\$ 30.00
GRW 12 E	1 607 014 17A	\$ 40.00
GSH 27 VC	1 617 000 425	\$ 40.00



WARRANTY

This serves to inform all Bosch Power Tools, GHP Range High Pressure Cleaners, Bosch Measuring Tools, Batteries and Chargers are guaranteed against manufacturing defects for a period of 12 months from the registered date of purchase (Except Aquatak Range High Pressure Cleaners and Garden Tools which are entitled to 6 months warranty. Terms and Conditions apply).

This guarantee, however, does not cover damage caused by accident, misuse, unauthorised repairs, tampering, additions and modifications made to the tool in any manner.

保证

谨此通知阁下有关所有博世电动工具, GHP 系列高压清洗机, 博世测量仪, 电池及充电器都享 有为期12个月之生产损坏保证,有效期从购买登记日算起. (除了Aquatak 系列高压清洗机及 庭园工具享有6个月保证, 附带条规).

无论如何,上述保证并不包括有关电动工具因意外,错误使用、非授权维修、附加及修换或其 他方式所造成的损坏及故障.



For further enquiries, please call 1 800 333 8 333 8.30am - 5.30pm Mon - Fri www.bosch-pt.com.sg

Key To Symbols



Double Insulation



Electronic Control



Rotation Stop



Constant Electronic



Forward / Reverse Rotation





Distortionresistant protective





Saw Blade Pendulum Action



Dust Extraction



Bosch SDS System



SDS-Plus Tool Holder



Slim Grip





SDS-Max



SDS-Plus Quick Exchange System



SDS-Max Quick Exchange System



SDS-Clic Quick Clamping System



Velcro Fastening



Inox For a perfect finish on stainless steel



Easy Fit



Turbo Blower



Removable Cable



Torque Control



Restart Protection



Fine Depth Adjustment



Direct Cooling and Additional Air Inlets



Kick Back Stop



Brushless Motor














NOTES




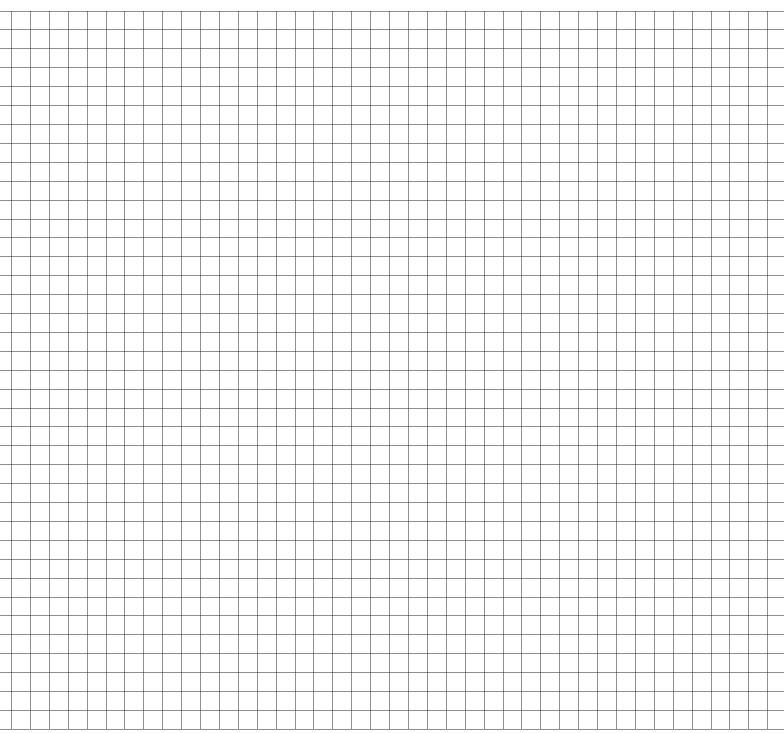



NOTES




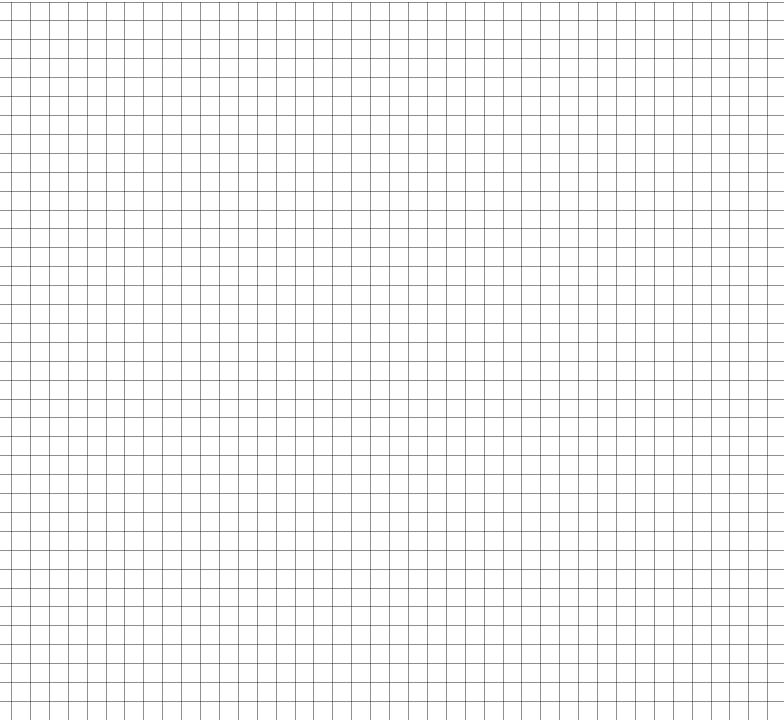



NOTES



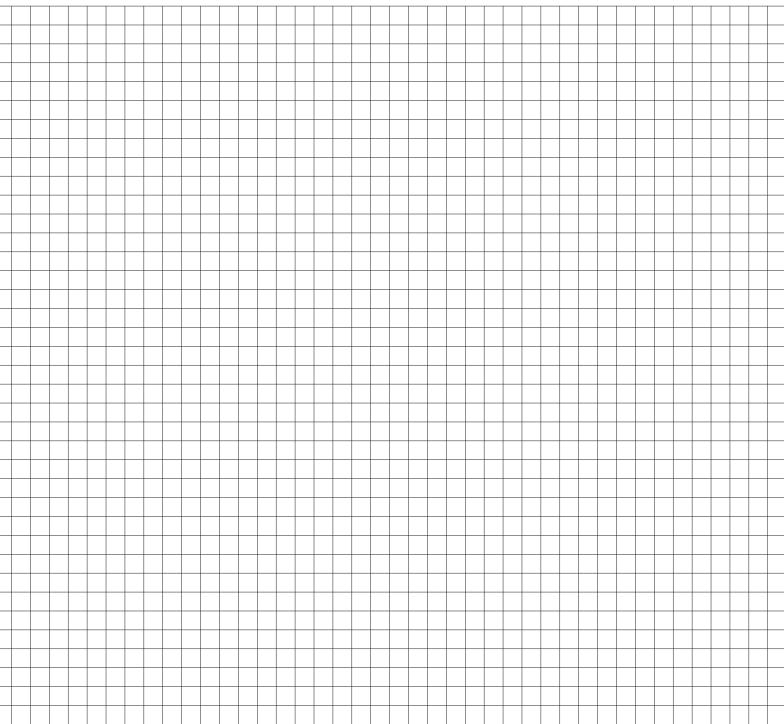





FREE Repair Costs!!





Robert Bosch (SEA) Pte Ltd 11 Bishan Street 21 Singapore 573943 Tel: (65) 6571 2772 Fax: (65) 6571 2784

For further enquiries, please contact

றி 1 800 333 8 333

Mon - Fri: 8.30am - 5.30pm

Authorised Service Centre:

Powerwell Service Centre Pte Ltd
4012 Ang Mo Kio Ave 10,
#01-02 Techplace 1, Singapore 569628
Tel: (65) 6452 1770 Fax: (65) 6452 1760
Email: ask@powerwellsc.com